


● **NOTE**

- Fixation par boulons HM24 qualité 10.9 (non fournis).
- Différentes options de fixations (ceinturage, plaque de prémontage, etc.).

Voir options générales en page 28.

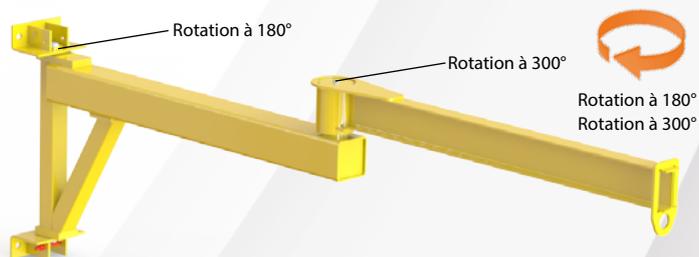

| Caractéristiques techniques valables sous charge nominale | | | | | | |
|---|--------------------------|-----------------|------|-----|---------------|---------|
| Capacité (kg) | Portée totale A=B (m) | Dimensions (mm) | | | Réactions | |
| | | IPE | type | D | T1 = T2 (daN) | V (daN) |
| 150 | 2 | 120 | A | 395 | 412 | 300 |
| | 3 | 120 | A | 395 | 655 | 340 |
| | 4 | 140 | A | 395 | 874 | 365 |
| | 5 | 140 | A | 395 | 1250 | 400 |
| 250 | 2 | 140 | A | 395 | 805 | 420 |
| | 3 | 140 | A | 395 | 1328 | 460 |
| | 4 | 160 | A | 395 | 1843 | 500 |
| | 5 | 180 | A | 395 | 2395 | 600 |
| 500 | 2 | 140 | A | 395 | 1593 | 800 |
| | 3 | 180 | A | 395 | 2488 | 900 |

PMA